
Chapter 4

Propeller Balance

(Revision 4, July 2007)

“Propeller Balance” is a function that is accessed from the ProBalancer’s Main Menu banner screen as shown in the illustration below. Selecting this function from the main menu brings up the “Propeller Balance” banner screen menu (also shown below). Each of the listings on this banner screen menu is an option within the function. Descriptions of each of these options follow, along with the information required to complete the menu screens within the options, and the steps necessary to perform propeller balance function.

Model 2015 ProBalancer Main Menu		
Propeller Balance		
Main Rotor Track & Balance		
Tail Rotor Balance		
Vibration Spectrum Surveys		
Monitor Spectrum		
Monitor IPS and Clock		
Monitor Magnitude and Phase		
Monitor Overall Vibration		
Check Track		
Transfer Data with PC		
Miscellaneous Items		
-Contrast	Default	+Contrast

Model 2015 ProBalancer Propeller Balance		
Start Job		
Resume Job		
Manage Jobs		
Manage Setups		
Weight Calculator		

4.1 - Start Job

Selecting “Start Job” from the “Propeller Balance” banner screen allows you to begin a new propeller balance job. When you select this option, one of three screens will appear depending on whether you are: 1) Starting a new job with no setups previously defined in the ProBalancer’s memory; 2) Starting a new job with previously defined setups available in the ProBalancer’s memory; or 3) Resuming an incomplete job being held in the ProBalancer’s memory.


If you are *starting a new job with no setups previously defined in the ProBalancer's memory*, the screen will automatically display the Prop Balance Setup banner screen shown below. See section 4.1.1. for step-by-step instructions on completing the Prop Balance Setup.

Model 2015 ProBalancer		
Prop Balance Setup		
Name:	<input type="text"/>	
Eng HP:	<input type="text" value="0"/>	Num of Eng: <input type="text" value="(1)"/>
Balancing RPM:	<input type="text" value="2400"/>	
Max Baln. Wts:	<input type="text" value="100"/>	
Wts relative to:	<input type="text" value="(Tape)"/>	
Rotation (#1):	<input type="text" value="(CW)"/>	
Tach Type:	<input type="text" value="(Optical)"/>	
Tach Chan:	<input type="text" value="(1)"/>	
Tach Pos (FLA):	<input type="text" value="(12):00"/>	
Sens Type:	<input type="text" value="(9910-1)"/>	
Sens Chan:	<input type="text" value="(A)"/>	
Sens Pos (FLA):	<input type="text" value="(12):00"/>	
Edit ICF	<input type="text"/>	Sensor

If you are *starting a new job with previously defined setups available in the ProBalancer's memory*, the screen will automatically display the Select Setup List banner screen similar to the one shown below. The actual setup names will be those that you have entered into your ProBalancer.

Select Setup List		
1 >	Commander	
2 >	King Air 90	
3 >	Cessna 310	
4 >	T-6 TEXAN II	
New	<input type="text"/>	<input type="text"/>

If you are resuming an incomplete job being held in the ProBalancer's memory, the opportunity to do so is presented immediately following the "Start Job" selection. The screen displays the message as shown below. If you press the [F1] "Yes" key, the ProBalancer will return you to the last logical in-progress step of the job. If you press the [F3] "No" key, the ProBalancer will proceed as described in the two examples above, depending on your circumstances.

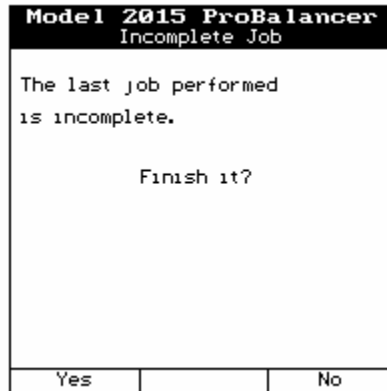

4.1.1 - Prop Balance Setup

The "Prop Balance Setup" banner screen allows you to define and store a propeller balance job. The "Prop Balance Setup" banner screen displays fill-in and selection fields. The fill-in fields have squared off ends ([]). These fields are filled in using inputs from the ProBalancer keypad. The selection fields have pointed ends (<>). These fields have two or more preset values that are selected by using the [⇒] and [⇐] keys. Navigate between the fields on this screen using the [↓] and [↑] keys. (Refer to Chapter 3, "Using the Model 2015 ProBalancer" if you are unfamiliar with using the keypad or inputting data.)

Complete the "Prop Balance Setup" screen per the following example.

4.1.1.1 – Propeller Balance Setup Description

To complete the “Prop Balance Setup” banner screen, do the following:

Model 2015 ProBalancer	
Prop Balance Setup	
Name:	
Eng HP:	0
Num of Eng:	(1)
Balancing RPM:	2400
Max Baln. Wts:	100
Wts relative to:	(Tape)
Rotation (#1):	(CW)
Tach Type:	(Optical)
Tach Chan:	(1)
Tach Pos <FLA>:	(12):00
Sens Type:	(9810-1)
Sens Chan:	(A)
Sens Pos <FLA>:	(12):00
Edit ICF	Sensor

In the “Name” field, enter a name for this setup using the keypad. (Refer to Chapter 3, “Using the Model 2015 ProBalancer” if you are unfamiliar with using the keypad.)

The name you choose will aid you in differentiating this setup from other stored setups should you choose to review or print it at a later time. The name should be one of your choosing which you will easily recognize and associate with this setup such as “Cessna 150,” “King Air,” or “T-6 TEXAN II.”

Using the [↓] key, move down to the “Eng HP” field. Enter the rated horsepower of the engine using the keypad.

Using the [↓] key, move to the “Num of Eng” field. Use the [⇒] key to “toggle” between the choices in this field to select the number of engines being balanced with this setup.

Move to the “Balancing RPM” field using the [↓] key. Using the keypad, enter the actual propeller RPM at which you intend to balance. If no manufacturer recommendation is available, refer to the *ACES Systems Guide to Propeller Balancing* included with your Model 2015 ProBalancer. A low cruise RPM is usually best.

Using the [↓] key, move to the “Max Baln.Wts” field. Enter the maximum total trim balance weight (in grams) allowed for this installation. If the manufacturer doesn’t specify a weight, refer to *the ACES Systems Guide to Propeller Balancing*.

Using the [↓] key, move to the “Wts relative to” field. Select “Tape” or “Sensor” using the [⇒] key. If using predetermined weight locations, select “Tape.” Decide if you wish to measure angles from the reflective tape or the vibration sensor as an index point. (Refer to the Chapter 2, ProBalancer Description for a detailed explanation of how to use the Propeller Protractor and the referencing tape or sensor.)

Move down to the “Rotation (#1)” field using the [↓] key. Using the [⇒] key, Select CW (Clockwise) or CCW (Counter-Clockwise) for the rotation of the propeller as viewed standing Forward of the propeller Looking Aft toward the tail of the airplane (FLA).

Using the [↓] key, move to the “Tach Type” field. Using the [⇒] key, select the type of tachometer you are using.

Tach Type selections for this field include:

“Optical” - Includes the Phototach and LaseTach.

“Mag (Lo)” - A magnetic interrupter with an output of 120mV or less.

“Mag (Hi)” - A magnetic interrupter with an output of more than 120 mV and not more than 5 volt.

“Monopole” - A monopole type pickup with an output of 120mV or greater.

“Tach Gen” - A one to three pole tachometer generator with an output of 390mV or more. (This type of input is normally used for synchronous vibration surveys and not for a once per rev signal used to calculate phase angles in balancing.)

Using the [↓] key, move to the “Tach Chan” field. Using the [⇒] key, select “TACH 1” or “TACH 2” according to the ProBalancer’s tach input channel you intend to use. The default for single sensor input is TACH 1.

Using the [↓] key, move to the “Tach Pos (FLA)” field. Using the [⇒] key, select the tach position. The tach position is determined by standing Forward of the propeller Looking Aft (FLA) toward the tail of the aircraft. From this viewpoint, determine the approximate clock position (1:00 to 12:00) of the tachometer pickup.

CAUTION

Sensors connected to Channel A and Channel B must be of the same type. Using different sensors during the same job will cause erroneous readings and problems achieving good balance results.


Move down to the “Sens Type” field using the [↓] key. Select the sensor type from the available options using the [⇒] key.

Move to the next field, “Sens Chan” using the [↓] key. Select sensor channel “A”, “B” or “A+B” according to which of the ProBalancer’s input channels you intend to use. The default for single-sensor input is Channel A. Use the [⇒] key to make the selection.

Using the [↓] key, move to the “Sens Pos (FLA)” field. Using the [⇒] key, select the vibration sensor position. The sensor position is determined by standing Forward of the propeller Looking Aft (FLA) toward the tail of the aircraft. From this viewpoint, determine the approximate clock position (1:00 to 12:00) of the sensing axis of the vibration sensor.

4.1.1.1.1 – Edit ICF

The “Edit ICF” (which corresponds to the [F1] key) selection appears at the bottom left of the “Prop Balance Setup” banner screen. Press the [F1] key if you wish to define the Influence Coefficients for this setup. The following “Edit ICF” banner screen is displayed.

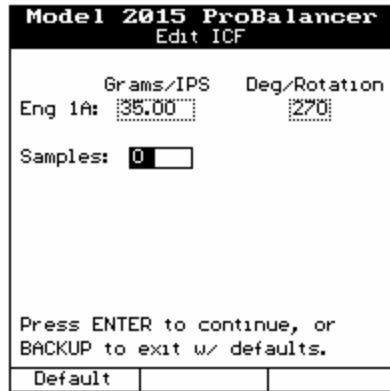


If you do not have ICF information for the balance setup, press the [F1] “Default” key. This sets the ICF at the default for the known conditions. The ICF default value is added automatically when the Setup is created. The user may use this key at any time to reset the ICF to default. If an ICF has been calculated by the ProBalancer and stored from previous runs, the “Samples” field displays the number of samples included in the calculation. (The Samples field is a display-only field and cannot be edited by the user.)

When satisfied with the displayed ICF, press [BACKUP] to return to the “Prop Balance Setup” banner screen.

4.1.1.1.2 - Sensor Setup

Pressing the [F3] “Sensor” key from the “Prop Balance Setup” banner screen displays the “Sensor Setup” banner screen shown below. The information on this screen should correspond to the sensor you selected for this setup in step 11 of section 4.1.1.1 above.

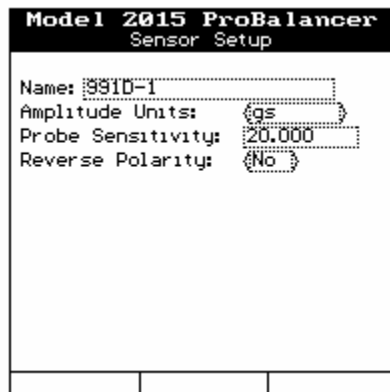

This is an information-only screen for use in verifying the parameters of the vibration sensor you have chosen. You may not edit or otherwise enter information on this screen. If this sensor does not possess the specifications you require for this setup, you may choose another sensor from the existing list. Press [BACKUP] or [ENTER] to exit this screen and return to the “Prop Balance Setup” banner screen.

When all fields are completed to your satisfaction, press the [ENTER] key to accept and store the setup. The ProBalancer will display the message, “Store this new setup?” If you choose to store this new setup in the ProBalancer’s memory, press the [F1] key for “Yes,” otherwise press [F2] for “No.”

4.1.2 - Customer Information

At this point in the “Propeller Balance” process, you should have completed the following steps: selected “Propeller Balance” from the Main Menu; selected “Start Job;” and completed the “Prop Balance Setup” screen which included editing ICF, or you selected a setup from a list of predefined setups.

If these steps have been completed, then the “Customer Information” banner screen will be displayed. Customer information is optional but will appear on the job printout if entered and will assist you in identifying this job when stored in memory. Complete the information fields using the keypad. Press [ENTER] to continue.

NOTE


If no customer information is entered, the job will be commonly labeled “Unnamed” in the resume and manage job lists. This will complicate finding a specific job, as multiple jobs are stored. We recommended you enter a customer name.

4.1.3 – Engine Information

The “Engine Information” banner screen is displayed. This information is optional but will appear on the job printout if entered and will assist you in identifying this job when stored in memory. Complete the information fields using the keypad. When finished, press [ENTER] to continue.

4.1.4 - Connect Sensors

The “Connect Sensors” banner screen will be displayed. Messages that appear on this screen prompt you to perform the physical installation and connection of the tach and vibration sensors to the input ports you specified in the setup.

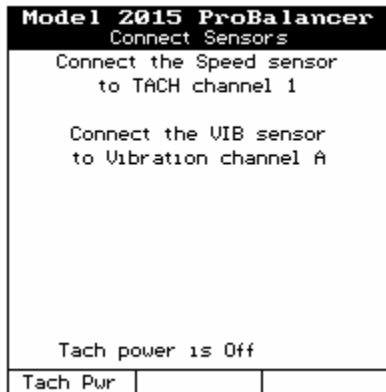

4.1.4.1 - Tachometer Setup

To install the tachometer, do the following:

1. Near the bottom of the screen, ensure that the message, “Tach Power is Off” is displayed and that the Block directly below this statement and corresponding to the [F1] key is labeled “Tach Pwr.” Press this key to supply power to the Tach for tape alignment.
2. Install the Phototach at the position specified in the setup. The Phototach should be not less than 4 inches but no greater than 18 inches from the back surface of the target blade. Use speed tape or duct tape to secure the 3x3 base mount to the cowling surface. An angle of approximately 5 degrees from perpendicular to the target blade will produce the best results.
3. Connect the tachometer cable to the Phototach connector. Route the cable away from hot areas and electrical equipment back to the cockpit and attach to the tach channel specified in the setup you are using. Secure the cable along its route with duct tape or tie wraps.

WARNING

Insure mag switches are off prior to any movement of the propeller.

4. Rotate the propeller to visually align the Phototach with a point on the backside of the target blade where you intend to place the reflective tape. Clean this area thoroughly to insure adhesion of the tape.
5. Cut a strip of reflective tape (3M Tape, Model 7610 is recommended) approximately 1.5 to 2 inches long. With the tape backing still in place, hold the tape in position on the propeller blade and move the propeller blade back and forth in front of the Phototach beam.

WARNING

Insure mag switches are off prior to any movement of the propeller.

NOTE

To insure quality reflective action back to the Phototach, use 3M 7610 reflective tape. Use of other reflective tape or devices may result in poor signals back to the Phototach.

NOTE

If balancing large-diameter or high-speed propellers, refer to Chapter 15, Equipment and Accessory Setup and Troubleshooting for information on reflective tape width requirements for these applications.

6. With an inspection mirror, watch the red LED gate indicator light on the aft end of the Phototach illuminate and extinguish as the tape crosses the beam. This indicates the position of the tape is correct.
7. Remove the tape backing and attach the reflective tape to the propeller at that location. Be sure to smooth out any wrinkles or bubbles in the tape. Ensure the edges are smoothed and firmly attached.


8. Connect the vibration sensor cable to the sensor connector. Route the cable away from hot areas and electrical equipment back to the cockpit and attach to the sensor channel specified in the setup you are using. Secure the cable along its route with duct tape or tie wraps.

NOTE

All trim balance weights installed during previous dynamic balance procedures should be removed before proceeding beyond this point. Refer to the ACES Systems' *Guide to Propeller Balancing* (included with your Model 2015) for a full list of FAA-approved inspection requirements.

4.1.5 – Start Aircraft

When you have completed the physical equipment setup tasks, press [ENTER] on the ProBalancer to continue with the propeller balance job.

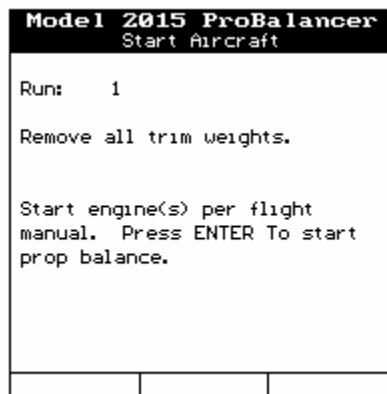

The ProBalancer will then display the “Start Aircraft” banner screen (shown above). Two information lines are shown on the screen. The first: “Remove all trim weights” and the second: “Start engine(s) per flight manual. Press [ENTER] to start prop balance.”


Removing previously installed trim balance weights is necessary to prevent stack ups, or attempts to counterbalance installed weights. Follow the instructions in the *ACES Systems' Guide to Propeller Balancing* included with your ProBalancer for inspections prior to balancing. The document is FAA approved and provides guidelines for the selection and installation of balance weights. When balance weights are removed and inspections are complete, press [ENTER] to continue.

4.1.6 - Acquiring Data

After starting the aircraft, the “Set Engine Speed” banner screen is displayed. At the top left of the screen, the run number is displayed. Directly below the run number, is the message, “Set eng # x RPM to: xxxx (where xxxx is the balance speed entered in the setup being used.) This is your target RPM for balancing. The next line, “Current RPM: xxxx.” indicates the RPM the propeller is turning currently. Attempt to match the two as closely as possible with throttle/prop lever adjustments. The next line, “Difference: xx” gives the current difference

between the Target and the Current RPM. When the target speed and current speed are matched as closely as possible, press [ENTER] to continue.

The screen changes to display the “Engine: x Run: x” banner screen. (See the figure below.)

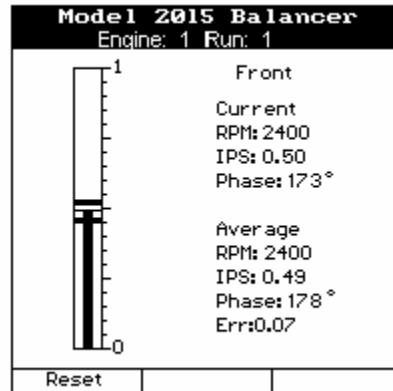

The converging vibration indicator shows the average amplitude. (See Chapter 16, Reading Spectrum and Scales, for information on how to read the data contained on this screen.) The sensor location (Front) is indicated at the top of the text, right side of the screen. The current and average frequency, amplitude, and phase are also displayed along with a numeric error value in the averaging. When the error is at its lowest point and no longer decreasing, press [ENTER] to stop the data collection process. If you wish to reset the averaging and take new data, press the [F1] “Reset” key.

4.1.7 – Review Job

When you are finished acquiring data, the “Review Job” banner screen (shown below) is displayed next. The amplitude and phase (IPS and DEG.) are displayed for each input channel. Data is displayed for only the input channels that were used for the job; others are left blank.

If you are satisfied with the results of the run and are ready for a solution, press [ENTER] to accept the data and continue.

If you want to retake data for this run, press the [F1] “Retake #1” key. This option returns you to the “Set Engine Speed” banner screen (see section 4.1.6 above).

Model 2015 ProBalancer				
Review Job				
	Sensor A		Sensor B	
Run	<IPS>	DEG.	<IPS>	DEG.
1	0.49	173		
Retake #1				

Once you have accepted data by pressing the [ENTER] key as described in the previous section, an information screen advising you to shutdown the aircraft in accordance with the flight manual is displayed. Shutdown the aircraft and press [F3] “Continue” to continue.

4.1.8 - Balance Solution

The “Balance Solution” banner screen shown below is displayed. The screen is identified at the top left as being “Run: 1.” Vibration amplitude and phase angle is displayed for each channel being used and a solution for the first run.

In this example screen shown below, the “Solution” is “17.1 GMS @ 263°” which means to place 17.1 grams (GMS) of weight at 263 degrees from the index point. (See Chapter 2, Description on how to use the Propeller Protractor to locate the phase angle.)

Model 2015 ProBalancer		
Balance Solution		
Run:	1	
Vib A:	0.49 IPS @ 173 °	
Solutions:	17.1 GMS @ 263 °	

Remove previous trim weights.		
Enter Actual Weight Installed		
	0.0	GMS @ 0 °
Input wt installed and press		
ENTER to continue or press		
F1 to split weights.		
Split Wt		Quit Job

In the lower portion of the screen you see an information line stating “Remove previous trim weights.” Since all previously installed trim weights were removed prior to the start of the first run; this is only a reminder for Run 1. This same information line in following runs means to remove the trim weights installed on the previous run. In other words, the balance solution and resulting weight installed here after Run 1 may change in Run 2. The weights installed after Run 1 would be removed and new weights added at another location to refine the balance solution.

NOTE

In subsequent runs, all installed weights from each previous run must be removed. The “remove weight” message will be repeated for every run and solution. Each new solution dictates that the previously applied solution (installed weight) be totally replaced. In some cases this may mean removing and reapplying weight at the same or near the same location. Failure to remove previously installed weight prior to applying the new solution weight will result in failure of the propeller balance function.

The next line of text states “Enter Actual Weight Installed.” In the weight and angle fields directly below this line, enter the exact amount of weight and the angle, as near as possible, where it was installed. If you are unable to install the exact amount of weight in the recommended solution, install a weight as near the suggested solution weight as possible. The important point is *whatever the actual amount of weight is, enter it here*. If the solution exceeds the single location limits of the propeller or spinner assembly (refer to *ACES Systems’ Guide to Propeller Balancing* included with your ProBalancer) you may split the weight across two locations. If you do not wish to split the weights, press [ENTER] to continue and then move to the end of this section, to continue with the instructions at the “Start Aircraft” screen.

4.1.8.1 – Set Split Weights

To use the split weight option, press the F1 “Split Weight” key from the “Balance Solution” banner screen. The “Set Split Weights” banner screen below is displayed.

```
Model 2015 ProBalancer
Set Split Weights

Split: 17.1 GMS @ 263 °


Enter New Location:
Angle 1: 0
Angle 2: 0

Input desired angles and
press ENTER to continue.
```

The single location solution (in this case 17.1 Grams @ 263 degrees) is displayed at the top of the screen. The next line states “Enter New Locations.” Use the keypad to complete the next two fields, “Angle 1” and “Angle 2.” Locate the two available weight installation locations (one on each side of the 263-degree location) and enter them in the two fields. Use the [↓] key to move between the fields. Press [ENTER] to continue.

4.1.8.2 - Record Split Weights


The screen displays the “Record Split weights” banner screen like the one shown below.

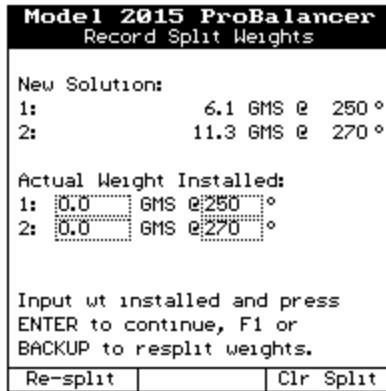


The “New Solution” is given for the two new angles you specified as available for weight application. Match the new weight solution as near as possible to the recommended solution and install it at the new angles. Weigh the test weights carefully and enter the exact amount of weight in the “Actual Weight Installed” fields.

If you discover a problem with the split weight locations you specified, press the F1 “Re-split” and enter the two new angles. Press [ENTER] to return to the “Record Split Weights” screen and enter the “Actual Weight Installed” adjacent to the corresponding angle. When the “Actual Weight Installed” fields are completed, press [ENTER] to continue.

The screen will return to the “Balance Solution” banner screen, as shown below, with the combined split-weight solution being displayed for the user. Press [ENTER] to continue.

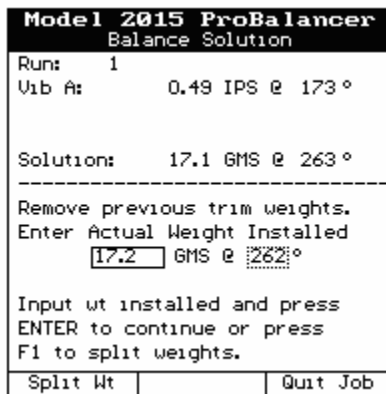

The screen will display the “Start Aircraft” banner screen shown below for the next run.

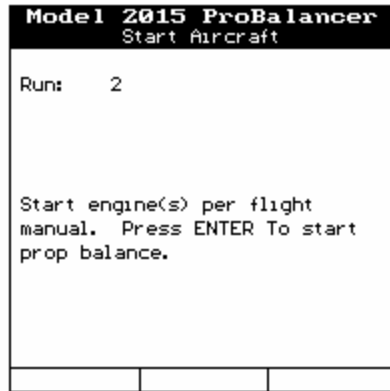


The “Start Aircraft” banner screen indicates the upcoming run number and directs you to “Start engine(s) per flight manual. Press [ENTER] to start prop balance.” Then repeat the procedures described above starting with item, 4.1.6 until the level of vibration is at or better than an acceptable level. See the *ACES Systems Guide to Propeller Balancing* for details of vibration levels and weight installation procedures.

NOTE

If the engine/propeller assembly is mechanically sound, a normal balance job should take no more than three runs to complete. The ProBalancer will only allow you to complete 6 runs in attempts to balance. If the balance job is not completed by the sixth run you should suspect possible problems with your technique or mechanical faults with the engine and/or propeller assembly. Mechanical faults may also be indicated by drastic changes in suggested weight or angle from one solution to the next.

4.1.9 Vibration Summary

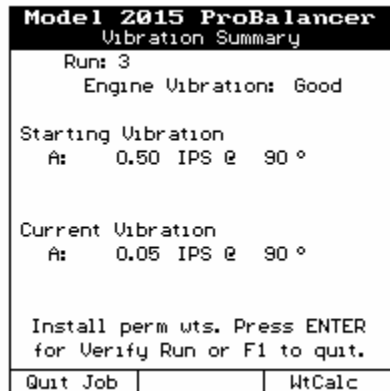

The vibration summary screen, as shown above, will appear when the current vibration measurement is below 0.07 IPS. The screen will display the run number at which the current vibration level was recorded. It will give a brief description of the current engine vibration level. The screen will show the starting vibration magnitude and phase angle on any channels defined in the setup. In the case above, measurements were recorded on channel A only. The

screen will also display the current vibration magnitude and phase on any channel defined in the setup.

The bottom of the screen prompts you to install the permanent weights. Use the [F3] “Wt Calc” button to automatically access the “Weight Calculator” as explained in paragraph 4.5 below. Pressing [ENTER] will start an additional run used to verify that the installation of the permanent weights retained satisfactory vibration level readings.


You can terminate the job at the current vibration reading and weight installation by pressing the [F1] “Quit Job” key. This will mark the job as complete. Two warning screens will appear. The first, shown below, asks you to confirm that you want to Quit the Job in progress. Press [F1] “Yes” if you are sure you want to complete this job. Press [F3] “No” to return to the “Vibration Summary” screen.

Model 2015 ProBalancer		
Warning! You are about to terminate this balance job Are you sure you want to quit?		
Yes		No

If you selected “Yes” to terminate the current job, a second screen will appear as shown below. Press [F1] “Yes” if the job went as expected. It is possible to update and store the calculated ICF in the setup. This allows you to refine the ICF and potentially reduce the number of runs required in future jobs using this same setup. Select [F2] “No” if the balance job did not go as expected. This will keep mistakes or poor mechanical condition from influencing the setup causing unnecessary runs when using the same setup in the future.

Model 2015 ProBalancer Update Setup ICFs?		
Do you want to update the setup's influence coefficients based on the result of this job?		
Yes		No

4.2 - Resume Job

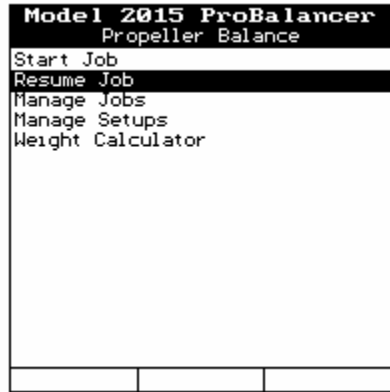


Selecting “Resume Job” from the “Propeller Balance” banner screen menu allows you to select a job to resume. Using the [↓] key, highlight the job you wish to complete from the list of incomplete jobs, and press [ENTER]. You will be taken to the last step completed in the job process.

NOTE

If you did not enter information in the optional “Customer Information” fields when starting a job, that job will be stored by the name, “Unnamed”. If several “Unnamed” jobs are listed, you may wish to review the data for each in order to ensure you are resuming the job you intended. See section 4.3 for specific guidelines on the Review function.

4.3 - Manage Jobs

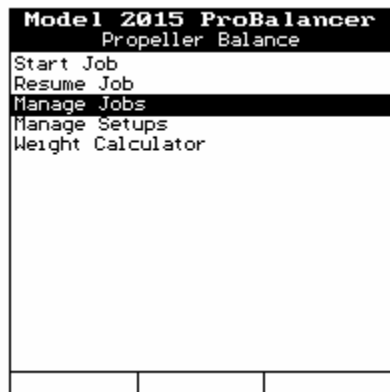

Selecting “Manage Jobs” from the “Propeller Balance” banner screen menu presents several sub-menu choices to choose from. These choices allow you to “manage” previously completed job data you have stored in the ProBalancer.

4.3.1 - Review

Selecting the “Review” option presents a list of stored jobs on the “Job List” banner screen. You can select one job for on-screen viewing. When viewing is complete, press the [BACKUP] or [ENTER] key to exit the screen. The ProBalancer will then return you to the “Manage Jobs” menu screen to select another function.

4.3.2 - Print

The “Print” option presents a list of stored jobs on the “Job List” banner screen. From the list, you may select one job for printing. See Chapter 14, “Printing” for a detailed explanation of how to set up the ProBalancer to print.

4.3.3 - Print All

The “Print All” option sends all currently stored jobs to the printer. When you select “Print All,” a message will appear on the ProBalancer’s “Print All Jobs” banner screen asking you to verify that you want to print all jobs. Answer the prompt, “Are you sure?” by pressing the [F1] key for “Yes” or the [F3] key for “No.” If you choose the “Yes” answer, ensure your printer is prepared (paper, print cartridge, etc.) to complete the number of jobs stored. The “Yes” answer will send *all* currently stored jobs to the printer. The “No” answer will return you to the previous menu.


4.3.4 - Delete

The “Delete” option presents a list of stored jobs on the “Job List” banner screen. From the list, you may select one job for deletion. After making your selection, the “Delete Job” banner screen will appear, asking you to verify your intent to delete the selected job by pressing the [F1] key for “Yes” or the [F3] key for “No.” You may wish to print the job for reference or permanent record prior to deleting. Once deleted, the job cannot be retrieved from the ProBalancer.

4.3.5 - Delete All

The “Delete All” option will delete all currently stored jobs. After selecting this option, the “Delete All Job” banner screen will appear, asking you to verify your intent to delete all the jobs by pressing the [F1] key for “Yes” or the [F3] key for “No.” You may wish to print the jobs for reference or permanent record prior to deleting. Once deleted, the jobs cannot be retrieved from the ProBalancer.

4.4 - Manage Setups

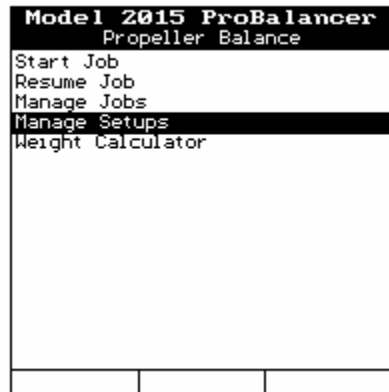

Selecting “Manage Setups” from the “Propeller Balance” banner screen menu presents several sub-menu choices to choose from. These choices allow you to “manage” setups you have stored previously in the ProBalancer.

4.4.1 - Edit

Selecting the “Edit” function displays the “Setup List” screen. Select the setup you wish to edit. The screen will display the “Propeller Balance Setup” screen. Edit the setup as necessary and press [ENTER] to store and exit the edited setup screen. Refer to section 4.1.1 for detailed instructions on how to complete/edit the fields in the “Propeller Balance Setup” screen.

4.4.2 – New

Selecting “New” will allow you to build a new propeller setup. After selecting “New”, the screen will display the fields necessary for building the new setup. Refer to section 4.1.1.

4.4.3 - Print

Selecting the “Print” function displays the “Setup List” screen. Ensure your printer is turned on and connected to the ProBalancer with the COMM/Print cable supplied with your ProBalancer. Select the setup you wish to print. (See Chapter 14, “Printing” for a detailed explanation of how to set up the ProBalancer to print.)

4.4.4 - Print All

Selecting “Print All” sends all currently stored setups to the printer. When making this selection, you will be asked to verify “Are you sure?” by pressing the [F1] key for “Yes,” or the [F3] key for “No.” If choosing the “Yes” answer, ensure your printer is prepared (paper,

print cartridge, etc.) to complete the number of jobs stored. The “Yes” answer will send *all* currently stored setups to the printer. The “No” answer will return you to the previous menu.

4.4.5 - Delete

The “Delete” option presents you with a list of stored setups. From the list, you may select one setup for deletion. If you wish to delete all stored setups, you must delete them individually. After making your selection, you will be asked to verify your intent to delete the selected job by pressing the [F1] key for “Yes,” or the [F3] key for “No.” We highly recommend you print the setup for reference or permanent record prior to deleting them. Once deleted, the setups cannot be retrieved from the ProBalancer.

4.5 – Weight Calculator

CAUTION

Before installing any permanent weights, the test weights must be removed. The test weights will be replaced by the weight suggested in the analyzer to compensate for the change in arm of the permanent installation location.

The weight calculator, as shown below, can be used for placement of the final balance weights. This function can be accessed from inside a job when the vibration level drops below 0.07 IPS by using the [F3] “Wt Calc” function key (see paragraph 4.1.9 above). It can also be used at any time to suggest the correct final balance weights to install based on any installed test weights.

Model 2015 ProBalancer		
Permanent Weight Calc		
Solution Weight:	0.00	
Solution Angle:	0.00	
* Spinner Diameter:	0.00	
* Offset:	0.00	
Split Angle:	(No)	
* Offset is the distance from the test weight to the permanent weight. Diameter and offset must be entered in the same measurement units		

Use the following description of each line to enter data in the weight calculator. Use the [↓] or [↑] key to move between fields.

1. In the “Solution Weight” line enter the amount of test weight in grams installed at the test location. This field will be automatically filled in if the weight calculator was activated as a result of pressing the “Wt Calc” key from paragraph 4.1.9 above. This

line will show the effective weight of any test weights installed. This includes the effective weight of any weight split.

2. In the “Solution Angle” line enter the angle of the installed test weight. Use the same method that you used for placing the initial test weight. This field will be automatically filled in if the weight calculator was activated as a result of pressing the “Wt Calc” key from paragraph 4.1.9 above. This line will show the effective solution angle of any test weights installed. This includes the effective weight of any weight split.
3. The “Spinner Diameter” value will be determined by measuring the outside diameter of the spinner. If the test weights were installed on a location other than the outer circumference of the spinner, use the measurement from the location where the test weights were installed. This value will typically be in inches.
4. The “Offset” is the distance the radius will change between the test weight location and the final weight location. This value must be entered in the same measurement units as used to enter the Spinner Diameter.
5. By selecting “No”, the final weight can be reinstalled at a single weight location. Or, using the “Split Angle” toggle field, you can select “Yes” to bring up the Split Weight screen as shown in paragraph 4.1.8.1 above.

The “Permanent Weight Placement” screen seen below will show the suggested weight to place at each location to compensate for the reduced radius from the previously installed test weights. How closely the vibration level recorded on the Verification Run matches the previous run will be dependent upon how closely the suggested weight values and angles were matched.

